

Data Sheet

Control 12 Wall Mount Constant Voltage DMX/RDM



Product Overview

Control 12 is the latest development in lighting control systems for LED's via standard DMX controllers. With a maximum load of 300W with inbuilt power supply or higher with external power supply, each controller provides 4 RGB outputs each with fuse protection.

Control 12 is available in 2 versions, built in power supply and external power supply.


RDM compliant device "ANSI/ESTA E1.20 Entertainment Technology - Remote Device Management over USITT DMX512"

RDM or Remote Device Management is a protocol enhancement to DMX512 that allows Bi-directional communications between light fixtures and lighting consoles or RDM specific software over a standard DMX line.

Custom LED
Solutions

Lighting
Control
Systems

Film & TV
Equipment

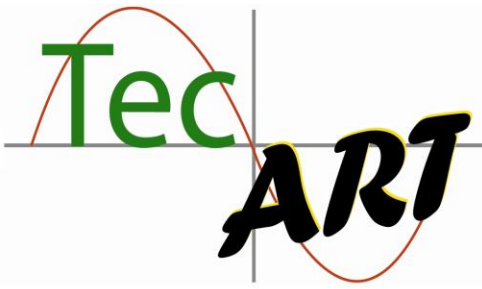

Features

- DMX-512 Input And Output 5 Pin XLR
- Internal Power Supply 24 VDC 300VA
- Terminal Strip Output Connector
- 2 Main indication LEDs
RED – Power ON, GREEN – DMX Receive

RDM Features

Control 12 is RDM compliant with the following functions :

- **Discovery** : Locates all RDM compliant devices on the DMX line.
- **Identifier** : Fixtures connected to driver will flash to show location.
- **Remote Addressing** : Allows you to set the DMX address remotely without the need to set dip switches.

Technical Data

Input voltage	100 – 240VAC
Power supply	Internal up to 300VA
Dimension	225 W x 350 L x 85 H
Mounting method	Desktop, Wall or Ceiling
DMX working mode	RGB 12 channels
DMX signal input	XLR 5 pin male
DMX signal output	XLR 5 pin female
Output channels	12
Color grades	256 levels (each color)
Driving capacity	2 Amp per channel (internal power supply) Max 320W across 12 channels
Output voltage	= to input voltage - stabilized voltage (PWM)
Temperature	0 – 40 Degrees Celsius